

CENTRIFUGAL PUMPS

Outstanding Features

- Impellers and Volutes are Constructed of Cast Iron for Durability and Long Operating Life (Engine Pumps Larger than 1" NPT)
- Pump Housings are Made of Die Cast Aluminum for Strength, Weight Reduction and Portability
- Strong Transport Protection Powder Coated Steel Roll Cages (Engine Pumps 2" or Larger)
- Honda Engines with Low Oil Shut Off (Engine Pumps 2" or Larger)
- Self Priming Up to 26', and a Maximum Head up to 141'
- Two-Year Limited Warranty on Pump Ends



SEH-50X




SEH-25L



SEH-80X

Performance Curves

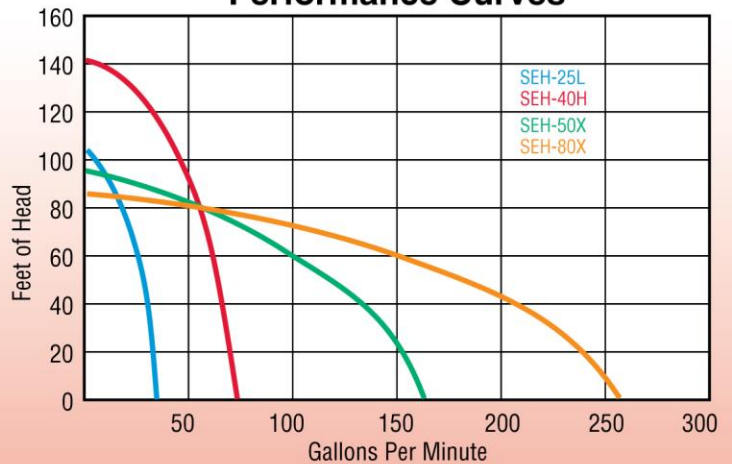

	SEH-25L	SEH-40H	SEH-50X	SEH-80X
Suction Discharge Size	1" NPT	1 1/2" NPT	2" NPT	3" NPT
Maximum Output	30 GPM	73 GPM	158 GPM	246 GPM
Maximum Discharge Head	106'	141'	98'	85'
Maximum Suction Lift	26'	26'	26'	26'
Maximum Pressure	45.9 PSI	61 PSI	42.4 PSI	36.8 PSI
Engine Model	GX25	GXH50	GX120	GX160
Engine Displacement	25 cc	49.4 cc	118 cc	163 cc
Engine Horsepower	1.0 HP	2.1 HP	3.5 HP	4.8 HP
Fuel Tank Capacity	0.15 Gal	0.20 Gal	0.66 Gal	0.82 Gal
Fuel Load Run Time	1.2 Hrs	0.83 Hrs	2.5 Hrs	2.5 Hrs
Fuel Type	Unleaded Automotive Gasoline			
Packaged Weight	16 Lbs	26 Lbs	55 Lbs	70 Lbs
Packaged Dimensions (LxWxH)	15"x10"x13"	16"x13"x18"	18"x14"x15"	20"x15"x18"



SEH-40H