Automatic solution mixing


- · Solution in tank is automatically mixed by intake air flow.
- The check valve is installed in the air flow route to prevent back flow of solution when the engine stopped.



Tube-mounted throttle

Single action button to turn on/off solution flow



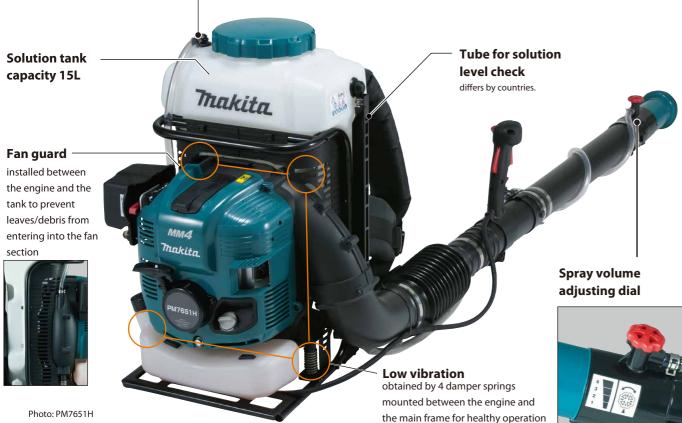

Accessories



	Part No.
End pipe 450	455632-2
End pipe 200	455631-4

Nozzles for mosquito extermination

	Part No.	
Nozzle set (0.7, 0.8)	196499-6	



453700-5

Straight pipe 380

O ring set

Gasoline filter

Air filter Part No. 442181-8


Spark plug (NGK CMR6A)

Mist Blower PM7650H 75.6cc 4-Stroke PM7651H Anti Vibration 75.6 cc 497 CFM Maximum Air Volu CDI Capacitor Discharge Ignition Diaphragm Type Auto Decompression 95.4 dB(A)

For blower use

Standard Equipment: Nozzle Set (196499-6), Flexible Pipe (412115-5), Straight Pipe 380 (453700-5), Swivel Pipe (168746-5), Shoulder Harness R (161510-3), Shoulder Harness L (161509-8), Hand Strap (163319-9), Band 25 Set (199237-5), Diffusion Cover (453506-1), Hose Clamp 76 (282024-0), Hose Clamp 100 (282025-8), Box Wrench (782237-8), Driver (783019-1), Spark Plug (0650109950), Starter Rope (444043-6)

When QUALITY & SERVICE COUNTS - Choose Makita makita.ca





Nozzles for mosquito control



For users considering control of disease-carrying mosquitoes, the following options are available: Nozzles for mosquito control ø0.5mm, ø0.7mm, ø0.8mm (These items are already used in Brasil.)



Comfortable backpack harness, well balanced solution tank design





- Low noise and clean exhaust emission
- Low fuel consumption and low running cost

- Unique L-shaped solution tank
 is extended into the space between user's back and
 the engine to lower the center of gravity to obtain
 ideal weight balance for operation.
- Back pad and Shoulder straps
 are designed for less stress to operator.
- Hard shoulder straps

 always keep their shapes to provide sufficient spaces
 from back pad for user to make re-shouldering action
 easier in the field.
- Large through hole of solution tank

 Air flow produced by blower's fan passes through the hole of solution tank to keep operator's back comfortable.









Diffusion cover (Wide spray attachment)

• Solution can be sprayed widely.



 The cover can be tied to the nozzle top with a string.



Various pipes available for added convenience

Straight pipe 330
 allows for easier spraying in narrow areas such as between orchard trees.

