

# HYPRO® 9306 SERIES

High Performance and High Efficiency Centrifugal Pumps

## Features & Benefits

- Designed for high efficiency, resulting in higher flow at working pressure
- The Life Guard silicon carbide seal comes standard in all 316 stainless steel models and is available as an option in cast iron models
- Available with universal flanged ports (300 x 220 or 220 x 220) for quicker installation and serviceability
- Cast iron or 316 stainless steel materials available for flexibility in pump selection
- Cast iron models come equipped with stainless steel wear rings for extended life in normal chemical spraying applications
- The most robust hydraulic motor in the crop spraying industry significantly reduces downtime and increases spraying days



Available with 220 x 220 or 300 x 220 universal flanged ports in both cast iron and stainless steel.









Stainless steel pumps provide superior chemical corrosion resistance, while maintaining material strength to prolong the life against abrasive wear.



Life Guard Silicon carbide mechanical seals come standard in all stainless steel centrifugal pumps and is available as an option on cast iron models.

# HYPRO® 9306 SERIES

## Specifications

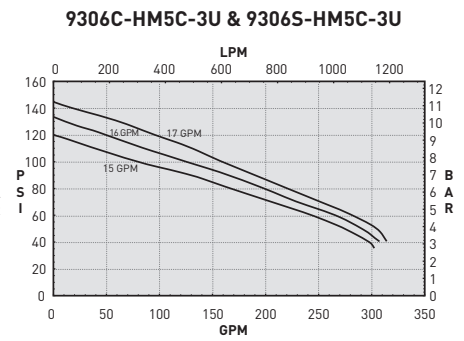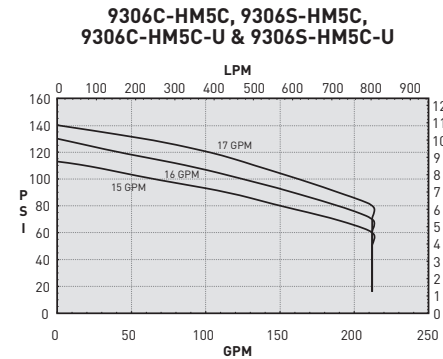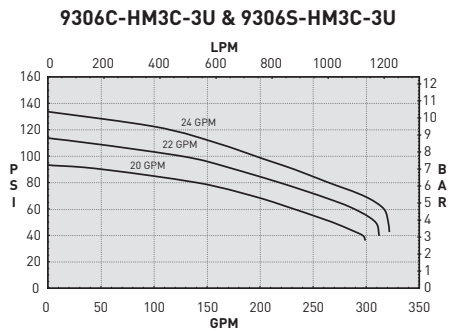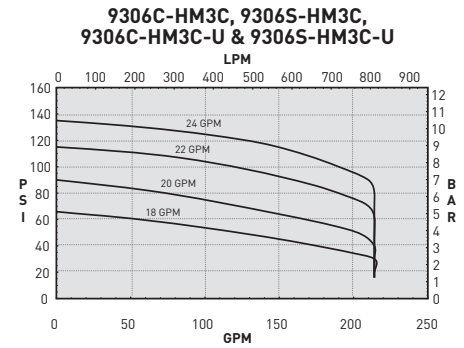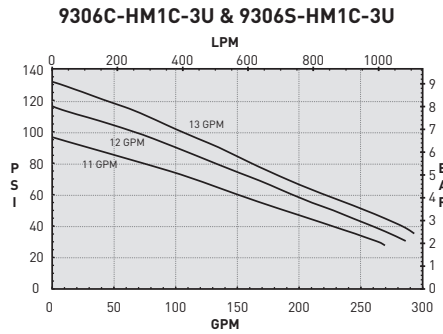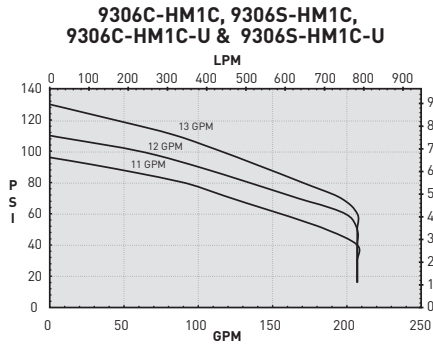

### Order Information

Model Number	Max GPM (LPM)	Max PSI (BAR)	Max Hyd. GPM (LPM)	Hydraulic Selection System	Life Guard	Universal Flange
9306C-HM1C	207 (784)	127 (8.8)	13 (49.2)	Open/Closed	Option	Option 220 x 220
9306C-HM3C	214 (810)	128 (8.8)	24 (90.8)	Open/Closed	Option	Option 220 x 220
9306C-HM5C	212 (803)	140 (9.6)	17 (64.4)	Open/Closed	Option	Option 220 x 220
9306S-HM1C	207 (784)	127 (8.8)	13 (49.2)	Open/Closed	Included	Option 220 x 220
9306S-HM3C	214 (810)	128 (8.8)	24 (90.8)	Open/Closed	Included	Option 220 x 220
9306S-HM5C	212 (803)	140 (9.6)	17 (64.4)	Open/Closed	Included	Option 220 x 220
9306C-HM1C-3U	283 (1071)	127 (8.8)	13 (49.2)	Open/Closed	Option	Included 3"
9306C-HM3C-3U	322 (1219)	128 (8.8)	24 (90.3)	Open/Closed	Option	Included 3"
9306C-HM5C-3U	312 (1181)	140 (9.6)	17 (64.4)	Open/Closed	Option	Included 3"
9306S-HM1C-3U	283 (1071)	127 (8.8)	13 (49.2)	Open/Closed	Included	Included 3"
9306S-HM3C-3U	322 (1219)	128 (8.8)	24 (90.3)	Open/Closed	Included	Included 3"
9306S-HM5C-3U	312 (1181)	140 (9.6)	17 (64.4)	Open/Closed	Included	Included 3"
3430-0332	Seal and o-ring repair kit					
3430-0589	Life Guard silicon carbide seal kit					

Optional Life Guard silicon carbide seal - Add suffix "B" [i.e. 9306C-HM1C-B3U]

Optional Universal Flange [220 x 220] - Add suffix "U" [i.e. 9306C-HM3C-U]



375 5TH AVE NW, NEW BRIGHTON, MN 55112 WWW.HYPROPUMPS.COM  
PH: 800-424-9776 ORDERS FAX: 800-323-6496

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.