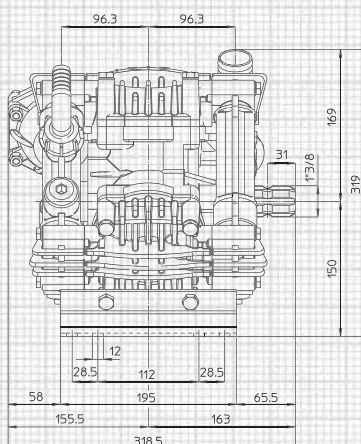
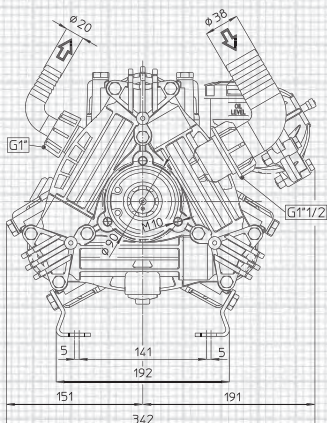


ZETA 120
ZETA 140

max. 116 l/min - 31 GPM • 20 bar - 290 PSI • 550 RPM

ZETA 140

max. 135 l/min - 36 GPM • 20 bar - 290 PSI • 550 RPM

**alberi P. di F. disponibili available P.T.O. shaft**

2-13



4-15

Solo/Only **ZETA 120**




1

13


Per le dimensioni
degli Alberi P. di F.
vedi pag. 35

For P.T.O.
Shaft dimensions
see page 35


applicazioni shaft adaptors



1




2



4



13



RIDUTTORI **15**
Vedi pag. 42

GEAR REDUCTIONS **15**
See page 42

MOD.	RPM	0 bar / 0 PSI				5 bar / 72 PSI				10 bar / 145 PSI				15 bar / 217 PSI				20 bar / 290 PSI				
ZETA 120		Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power		Peso Weight
		l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	Kg
	400	86.9	23.0	0.9	0.6	83.7	22.1	1.1	0.8	82.8	21.9	2.1	1.6	82.2	21.7	3.2	2.3	81.9	21.6	4.2	3.1	18
	450	96.6	25.5	1.0	0.7	93.4	24.7	1.2	0.9	92.5	24.4	2.4	1.7	91.9	24.3	3.5	2.6	91.6	24.2	4.7	3.5	
	500	106.3	28.1	1.1	0.8	103.1	27.2	1.3	1.0	102.2	27.0	2.6	1.9	101.6	26.8	3.9	2.9	101.3	26.8	5.2	3.8	
	550	116.0	30.6	1.2	0.9	112.8	29.8	1.4	1.1	111.9	29.6	2.9	2.1	111.3	29.4	4.3	3.1	111.0	29.3	5.7	4.2	
ZETA 140	400	101.7	26.6	1.0	0.7	97.6	25.8	1.3	0.9	97.2	25.7	2.5	1.8	96.9	25.6	3.7	2.7	96.7	25.5	5.0	3.6	18
	450	119.8	31.4	1.2	0.9	108.7	28.7	1.4	1.0	108.3	28.6	2.8	2.0	108.0	28.5	4.2	3.1	107.8	28.5	5.5	4.1	
	500	123.9	32.5	1.2	0.9	119.8	31.7	1.5	1.1	119.4	31.5	3.1	2.3	119.1	31.5	4.6	3.4	118.9	31.4	6.1	4.5	
	550	135.0	35.4	1.3	1.0	130.9	34.6	1.7	1.2	130.5	34.5	3.3	2.5	130.2	34.4	5.0	3.7	130.0	34.3	6.7	4.9	